

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/79781 A1

(51) International Patent Classification: H04N 3/00,
7/01, 9/00

(21) International Application Number: PCT/AU00/00673

(22) International Filing Date: 16 June 2000 (16.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 1018 17 June 1999 (17.06.1999) AU

(71) Applicant (for all designated States except US): DY-
NAMIC DIGITAL DEPTH RESEARCH PTY LTD.
[AU/AU]; 8 Brodie Hall Drive, Bentley, WA 6102 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HARMAN, Philip,
Victor [AU/AU]; 45 Vantor Street, Scarborough, W.A.
6019 (AU). HEAVEY, Patrick, Joseph [AU/AU]; 38
Hooson Way, Wilson, W.A. 6107 (AU).

(74) Agent: WATERMARK PATENT & TRADEMARK
ATTORNEYS; 4th Floor, "Durack Centre", 263 Adelaide
Terrace, Perth, W.A. 6000 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,
TT, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: IMAGE ENHANCEMENT SYSTEM

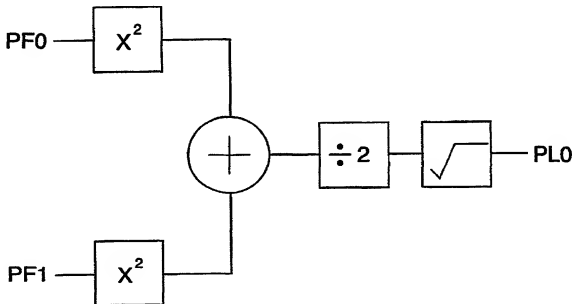

(57) Abstract: A method of determining an interpreted line in a line doubling system including the steps of determining the value of pixels on adjacent lines, determining the Root Mean Square (RMS) value of the pixels on adjacent lines, and utilizing the RMS value to create the interpreted line.